



- 25 Year System Warranty
- Exceeds ISO/IEC Performance Standards
- High Density 50 Voice Ports in 1U

Product Description

The Eco High Density Voice panel offers exceptional Cat3 performance whilst presenting 50 RJ45 voice ports in 1U of space.

The Panel enables vertical IDC punch down and has built in rear cable management to provide support and protection for the cable.

Features and Benefits

- High density voice panel 50 ports per 1U
- Built in rear cable management
- Exceeds all ISO/IEC 11801 and ANSI/TIA/EIA 568-C.2 performance standards
- Manufactured to exacting ISO 9001 quality standards
- Accepts Krone style punch down tools
- Sturdy robust construction
- RoHS compliant - lead free
- All 4 pairs presented

| Product Description | Ordering Code | UNS Number |
|---------------------------------|---------------|------------|
| Eco High Density Voice Panel 1U | 1/5008VIDC/BK | 853-00008 |

Technical Description

The High Density Voice panel presents 50 RJ45 voice ports in 1U of space.

Eco High Density Voice panel has been tested to exceed all ISO/IEC 11801 and ANSI/TIA/EIA 568-C.2 Cat3 performance standards.


Dimensions and Product Construction Specification

| Ordering Code | Height | Width | Depth | Weight (Approx) |
|---------------|---------|----------|----------|-----------------|
| 1/5008VIDC/BK | 44.00mm | 482.50mm | 134.00mm | 2kg |

- Jack life min. 1000 insertions
- Wire gauge 22-26 AWG
- Max. of two wires per contact (same gauge)
- IDC life up to 50 re-terminations

Applications Supported

The High Density Voice panel is designed to support any existing voice infrastructure running over a Cat3 system.

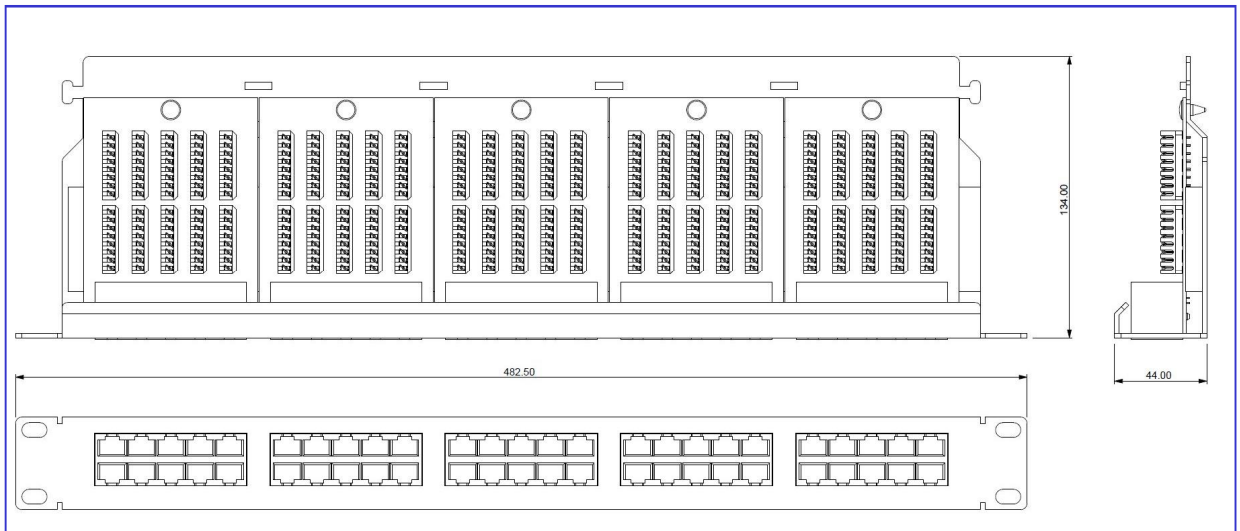

Sales: 01604 707420
Website: www.htdata.co.uk



Tel: +44 (0) 1604 707420
Web: www.htdata.co.uk
Email: sales@htdata.co.uk